



About

Publications

Librarians

Authors

Publishing Partners

Advertisers

Careers

Contact Us

A Close-up View of Materials as they Stretch or Compress

SHARE THIS



A team of researchers has created a new tool to nondestructively characterize structural materials in unprecedented detail as they deform, which, in turn, could lead to aerospace components that are lighter and more tolerant to damage.

From the Journal: *Review of Scientific Instruments*

By AIP News Staff

WASHINGTON D.C. Sept. 8, 2015 -- Materials scientists are busy developing advanced materials, while also working to squeeze every bit of performance out of existing materials. This is particularly true in the aerospace industry, where small advantages in weight or extreme temperature tolerance quickly translate into tremendous performance benefits.

The potential pay-offs motivated a team of researchers from the Air Force Research Laboratory, the Advanced Photon Source, Lawrence Livermore National Laboratory, Carnegie Mellon University and PulseRay to work together to pursue their shared goal of characterizing structural materials in unprecedented detail.

In a paper in *Review of Scientific Instruments*, from AIP Publishing, the group describes how they created a system to squeeze and stretch a material while at the same time rotating and bombarding it with high-energy synchrotron X-rays. The X-rays capture information about how the material responds to the mechanical stress.


"This required developing a loading system to enable the precise rotation of a sample while simultaneously and independently applying tensile or compressive axial loading," explained Paul A. Shade, lead author and a materials research engineer for the Air Force Research Laboratory at Wright-Patterson Air Force Base.

Their approach included "developing and validating micromechanical models to help us understand the sources of failure in materials so that we can produce aerospace components that are lighter and more damage tolerant -- while also gaining a more complete understanding of their service lifetime capability," Shade added.

The main significance of the team's new tool is that "the RAMS load frame insert enables applying axial loads while the specimen is continuously rotated, which means that we can integrate near-field and far-field high-energy diffraction microscopy methods and microtomography with in situ mechanical testing," said Shade. "This allows us to nondestructively characterize the microstructure and micromechanical state of a deforming material—providing critical validation data for microstructure-sensitive performance-prediction models."

The materials community is interested in using the team's tool as part of an integrated computational materials engineering approach to design structural components -- which could help optimize materials properties and reduce uncertainty for given applications. The measurements that this tool enables can be used to develop new materials for turbine engines, car parts and industrial machinery, to name just a few applications.

"An important aspect is to develop trusted materials models whose performance has been validated at the appropriate length scale," Shade said.

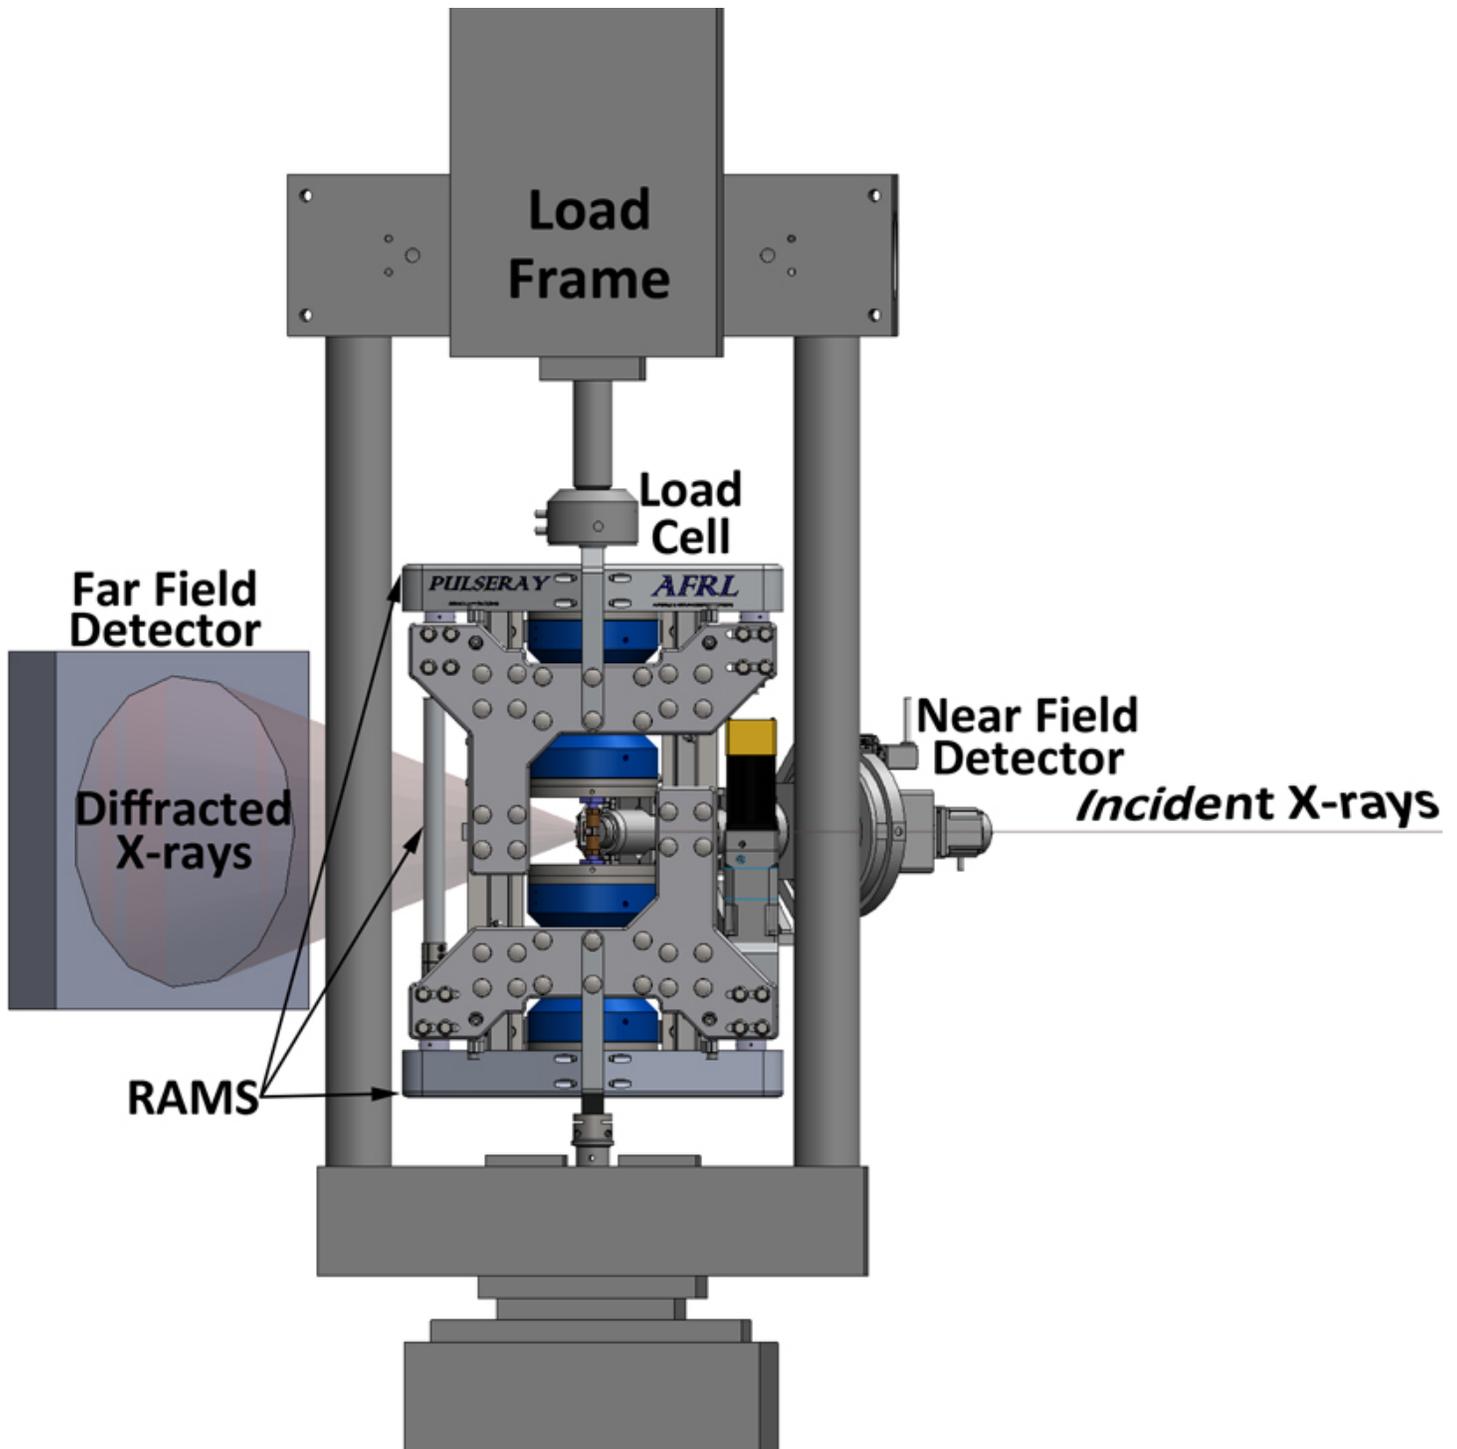

This setup is used for high-energy diffraction microscopy experiments—it involves a rotational and axial motion system load frame insert in a conventional load frame along with near-field and far-field detectors. The loading axis is vertical, and the specimen and specimen grips rotate around the loading axis while the rest of the setup remains stationary.

CREDIT: Review of Scientific Instruments

The next step for the team will be partnering with researchers at the Cornell High Energy Synchronous Source (CHESS), Cornell University and the Advanced Photon Source (APS) at Argonne National Laboratory to develop standalone RAMS load frames. "These instruments will be made available to the high-energy synchrotron X-ray community and, in fact, have already been used by many researchers and institutions," Shade noted.

The team is currently working with CHESS and APS to develop elevated temperature and multi-axial loading capabilities. The RAMS load frame insert has also inspired the development of a tension in-vacuum furnace design for studying irradiated materials at APS that was developed in concert with the Nuclear Engineering Division at Argonne National Laboratory.

"We plan to host the datasets we collect from these experiments for others in the community to use -- especially to test new materials models," Shade said. "In this manner, we'll help propel the community to develop microstructure-sensitive materials models and provide the validation needed to push materials to the next level of performance."

###

For More Information:

Jason Socrates Bardi

jbardi@aip.org

240-535-4954

[@jasonbardi](#)

Article title: [A rotational and axial motion system load frame insert for in situ high- energy x-ray studies](#)

Authors:

Paul A. Shade, Basil Blank, Jay C. Schuren, Todd J. Turner, Peter Kenesei, Kurt Goetze, Robert M. Suter, Joel V. Bernier, Shiu Fai Li, Jonathan Lind, Ulrich Lienert and Jonathan Almer

Author affiliations:

Air Force Research Laboratory, PulseRay, Argonne National Laboratory, Carnegie Mellon University and Lawrence Livermore National Laboratory

About the journal:

Review of Scientific Instruments

Review of Scientific Instruments publishes original research and review articles on instruments in physics, chemistry, and the life sciences. The journal also includes sections on new instruments and new materials.

<http://rsi.aip.org>

Follow us:



U.S. Headquarters

1305 Walt Whitman Road
Suite 300

Beijing office

北京市海淀区科学院南路2号
融科资讯中心C座
南楼5层556室
邮编: 100190
电话: 010-59822066

Popular Links:

[Physics and Astronomy Classification Scheme® \(PACS®\)](#)
[Physics Today Jobs](#)
[Physics Today Buyers Guide](#)

Melville, New York 11747

+1 516 576 2200

© 2016 AIP Publishing LLC | [Contact](#)

Industry Partners:

